


NOTE 1: COAT PROTECTION BOARD WITH ADHESIVE (APPROX. 2-1/2 TO 3 GAL./100 SQ. FT.) ALLOW TO "TACK" BEFORE ADHERING TO INSULATION.

NOTE 2: LAURENCO PROTECTION COURSE LAID END TO END (LENGTH PARALLEL TO SLOPE) BRICK PATTERN WITH OFFSET VERTICAL JOINTS.

LAURENCO PROTECTION COURSE SEE NOTE 2.

1/8" X 4" BUTYL SEALANT TAPE SEE DETAIL 105 FOR APPLICATION INSTRUCTIONS.

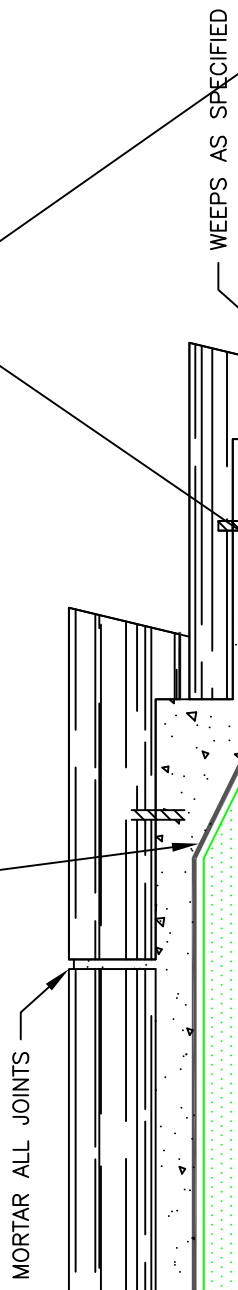

WEEPS AS SPECIFIED

2 PLYS W/P FIELD SHEETS

1/8" X 4" BUTYL SEALANT TAPE

2 PLYS W/P SHEETS AS FLASHING OVER THE BUTYL TAPE

POLYSTYRENE 60% PSI OR GREATER.

**INHABITED SPACE**

1/8" X 4" BUTYL SEALANT TAPE SEE DETAIL 105 FOR APPLICATION INSTRUCTIONS.