


NEEDED FIBER

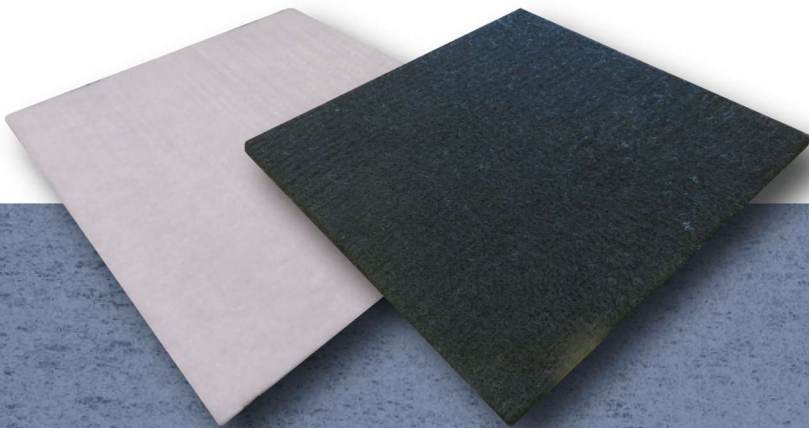

DESCRIPTION

Fiberworx needed felt products are mechanically bonded, making them ideal for applications requiring denser or stronger materials.

HIGHLIGHTS

- Odorless
- Self-extinguishing
- Mildew/bacteria resistant
- Flexible
- Easily laminated
- Strong acoustic and thermal insulation
- Chemical resistant

APPLICATIONS

- Dual Impedance
- Light Weight Facings
- Headliner Silencers
- Pillar Acoustics
- Trunk Silencers
- Wheel House Liners
- Under Carpet Insulators
- Engine Bay Acoustics
- Dash Silencers
- EVA/Fiber Composites

SPECIFICATIONS

- GMW16653
- Ford WSS-M99P32-E2 – E5
- FCA MS-HZ-100 C

PROPERTIES

DENSITY	100-2000 GSM
THICKNESS	1-12MM
MAX WIDTH	100+”
COLOR	White, black, or charcoal
MATERIAL SELECTION	Virgin or recycled